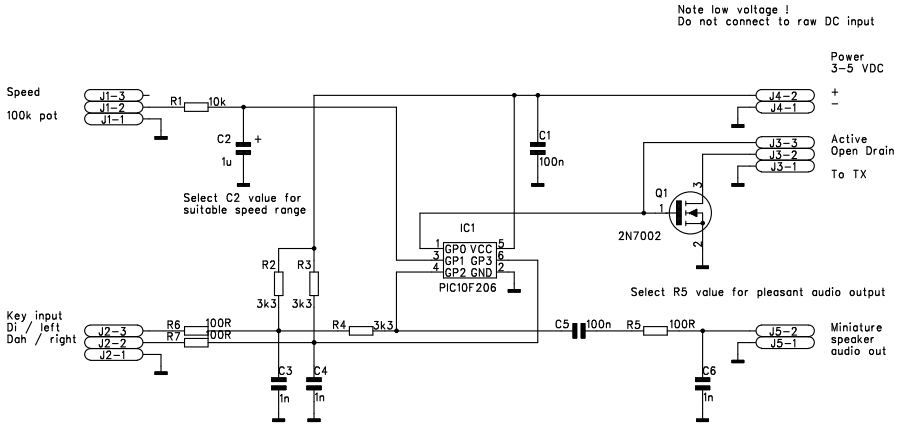


All passive components 1206 size

PIC10F206 must be programmed before soldering

| | | | | |
|---|---|---|---|---|
| Miniature keyer<br>Iambic and Golden Key mode available | OH2NLT | Drawn | 29.12.2005 | Si-TECNO OY<br>JNi |
| | DRAWING No.<br>Rev. A2, 1206 size comp, 29.01.2005 | Appr. | | Page 1 |

oh2nltkey_1206.sch-1 - Sun Jan 29 20:50:00 2006