

Thank you for purchasing this new product. Please read this instruction manual carefully before placing your HMC-3 in service.


CAUTION

Turn off transceiver power switch before plugging or unplugging the HMC-3 headset.

■ INSTALLATION


Set the volume control on the transceiver to minimum before connecting the headset.

1. Turn the transceiver POWER switch OFF.
2. Insert the headset plug into the MIC/SP jack on the transceiver.
3. Put the headset on and adjust the band so that the headset sits comfortably on your head. Insert the earphone into your ear.
4. Turn the transceiver POWER switch ON, then adjust the volume on the transceiver for a comfortable listening level.
5. Adjust the microphone boom so that the microphone is approximately 1~3 cm (0.4~1.2 inch) from your mouth.
6. Attach the VOX unit to your pocket, etc., using the attached hook.

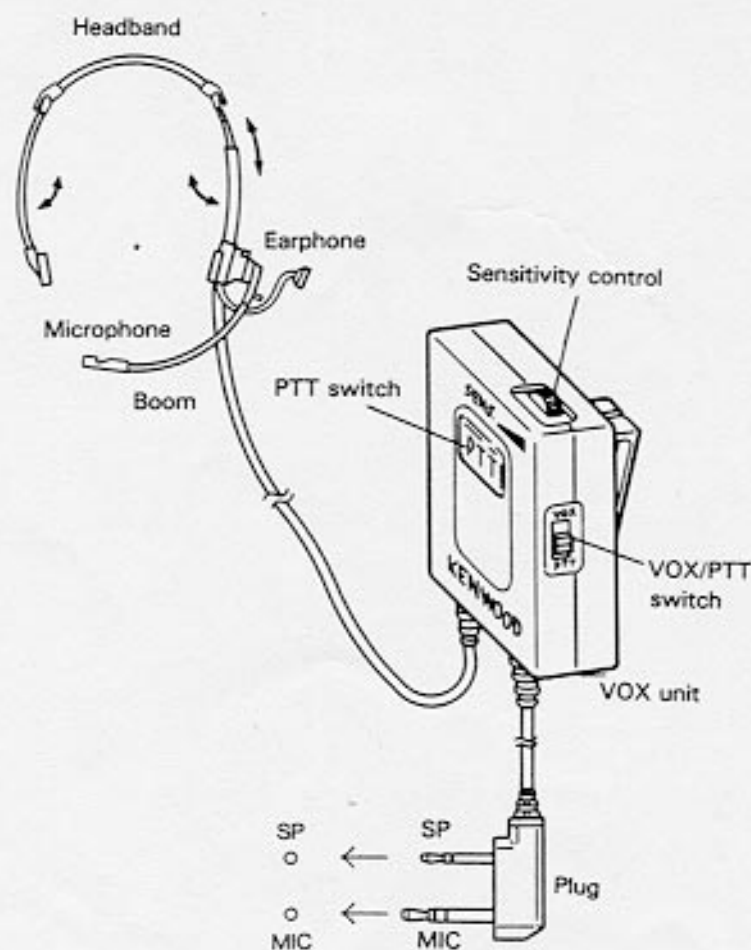

■ VOX OPERATION

1. Place the VOX/PTT switch on the VOX unit to the VOX position.
2. Adjust the sensitivity control on the VOX unit to the desired level. When the ambient noise level is high, or conditions are windy, you can reduce the sensitivity by turning the control counterclockwise. In quiet locations you can increase the sensitivity by turning the control clockwise. The VOX delay is approximately 1 second.

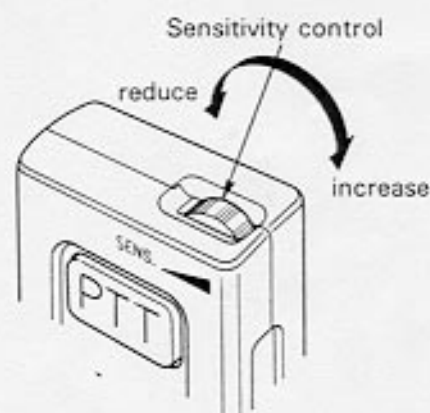

■ PTT SWITCH OPERATION

1. Place the VOX/PTT switch to the PTT position.
2. Press and hold the PTT switch on the VOX unit whenever you wish to transmit.

NOTE

During PTT switch operation you can adjust the microphone sensitivity with the sensitivity control. To increase sensitivity turn the control clockwise.

CAUTION

1. Do not increase the volume to a level that may cause discomfort.
2. The volume level of the transceiver speaker and headphone are not the same. Be sure to decrease the volume level before putting on the headset.
3. The PTT switch on both the transceiver and the HMC-3 will function regardless of the VOX/PTT switch setting on the HMC-3.